

## Silicate Injection Grouts

# WEBAC® 2061



- ▶ WEBAC® 2061 is a low viscosity silicate injection solution for stabilizing soil and masonry.


### Range of application

- Filling, solidification and stabilization of non-binding to low binding types of soil
- Solidification of masonry and porous natural stone constructions

### Properties

- Low viscosity
- Water resistant
- Resistant to common soil minerals

### Example

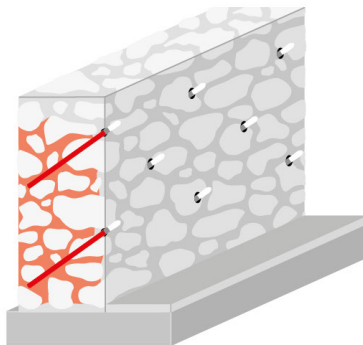

*Solidification of masonry*

WEBAC-Chemie GmbH  
Fahrenberg 22  
22885 Barsbüttel  
Germany  
Tel. +49 40 67057-0  
Fax +49 40 6703227  
info@webac.de

[www.webac.de](http://www.webac.de)

## ▶ Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.  
© WEBAC-Chemie GmbH. Version 12/18

# Silicate Injection Grouts

## WEBAC® 2061

Technical data	Values	
Mixing ratio	10 : 1 parts by volume	
Density, 20 °C / 68 °F (ISO 2811)	Comp. A Comp. B	≈ 1.3 g/cm <sup>3</sup> ≈ 1.2 g/cm <sup>3</sup>
Pot life	20 °C / 68 °F ≈ 15 min (solidified after ≈ 25 min)	
Application temperature Building structure and material	> 10 °C / 50 °F	
Viscosity of mixture	23 °C / 73 °F ≈ 20 mPa·s	12 °C / 54 °F ≈ 35 mPa·s
Compressive cylinder strength material-sand mix, 28 d	≈ 25 N/mm <sup>2</sup>	
Exposure scenarios according to REACH	Assessment of industry standard application	

WEBAC-Chemie GmbH  
 Fahrenberg 22  
 22885 Barsbüttel  
 Germany  
 Tel. +49 40 67057-0  
 Fax +49 40 6703227  
 info@webac.de

[www.webac.de](http://www.webac.de)

The specified data are values determined under laboratory conditions and are subject to a certain fluctuation. Deviations are possible in practice depending on the respective object situation.

## Silicate Injection Grouts

# WEBAC® 2061



### Preparatory work

#### Structural analysis before masonry injection:

- Masonry condition
- Moisture condition
- Masonry structure
- Salt contamination

#### Structural analysis before soil solidification:

- Foundation soil examination
- Soil survey
  - Soil condition
  - Ground water level
  - Flow behavior of the water

#### This provides following information:

- Practicability of injection
- Choice of drill hole packers or lances
- Positioning of drill holes

▶ See **WEBAC Brochure Sealing of Masonry**



### Mixing

#### Application by 1C pump

- Empty component A and B at the given mixing ratio into a bucket (make sure that the containers are completely empty) and mix homogenously
- Transfer the mixed material to the hopper
- In case of separation, stir briefly



### Application instruction

- The mixture must be used completely within 15 minutes
- Only use pure WEBAC material without any residues of cleaning agents or other impurity



### Application

#### Masonry solidification

- The injection pressure depends on the nature and condition of the building structure
- Inject the material from bottom to top, beginning at the lower grid level
- Continue the injection until resin leaks out from the masonry and/or from the adjacent packers. This is necessary to get an even material distribution

#### Soil solidification

- The material is applied by injection with a 1C pump via drill holes/lances



### Final work and cleaning

- Once the material has cured remove the packers
- Clean and close the drill holes with suitable non-shrinking mortar
- Cured material must be removed meachnically
- Rinse injection pump with water
- For detailed information refer to the operating manual of the injection pump used

WEBAC-Chemie GmbH  
 Fahrenberg 22  
 22885 Barsbüttel  
 Germany  
 Tel. +49 40 67057-0  
 Fax +49 40 6703227  
 info@webac.de

[www.webac.de](http://www.webac.de)

## Silicate Injection Grouts

# WEBAC® 2061

Product data	
Application	Injection by 1C pump
Packing	<b>Comp. A</b> 255 kg
	<b>Comp. B</b> 22.4 kg
Storage	26.7 kg
	<ul style="list-style-type: none"> <li>• Between 5 °C / 41 °F and 30 °C / 86 °F</li> <li>• Protect from moisture</li> <li>• In original, sealed containers</li> </ul>
Compatibility/Resistance	Resistant to common chemical loads in building structures

WEBAC-Chemie GmbH  
 Fahrenberg 22  
 22885 Barsbüttel  
 Germany  
 Tel. +49 40 67057-0  
 Fax +49 40 6703227  
 info@webac.de

[www.webac.de](http://www.webac.de)

### Occupational safety

The safety regulations of the industrial trade associations and the WEBAC Safety Data Sheets are to be observed at all times when working with this product. Safety data sheets according to Regulation (EC) No. 1907/2006 (REACH) must be accessible to all persons responsible for occupational safety, health protection and the handling of materials. For further information, please see the separate information sheet "Occupational Safety" in our product catalog or [www.webac-grouts.com](http://www.webac-grouts.com).

### Waste disposal

In Germany, empty containers can be disposed of via "Interseroh Dienstleistungs GmbH" observing the respective terms and conditions. It is not possible to dispose of containers at production facilities or delivery warehouses. For more detailed information, please see the separate information sheet "Information on the disposal and return of WEBAC packaging" in our product catalog or [www.webac-grouts.com](http://www.webac-grouts.com) and the safety data sheets.