


Injection Gels

WEBAC® 240 CE* U

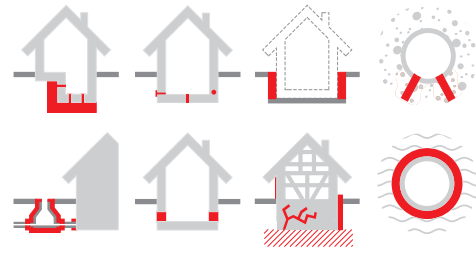

► WEBAC® 240 is a polyacrylate gel for sealing building structures and joints, specially suitable for curtain injections. Due to a multifunctional modular system various applications are possible.

Range of application

WEBAC. 240

- Curtain injection
- Stabilization and sealing of foundation soil
- Damp proof course (dpc)
- Backfilling of joints
- Construction sealing of buildings
- Micro tunneling

WEBAC. 240 + Bseal I CE*

- Protection and repair of concrete structures according to EN 1504-5 (CE-Declaration of Performance 2+)
- Repair of damaged web and foil sealings
 - With ground contact
 - In tunnels, sewers, shafts, bridges and basements
- Sealing of annular gaps and voids in tubing constructions
- Backfilling of joints
- Sealing joints with permanent contact to water


WEBAC. 240 + Bseal II

- Sealing of annular gaps and voids in tubing constructions
- Curtain injection
- Sealing of damaged sealings with ground contact
- Backfilling of joints

WEBAC-Chemie GmbH
 Fahrenberg 22
 22885 Barsbüttel
 Germany
 Tel. +49 40 67057-0
 Fax +49 40 6703227
 info@webac.de

www.webac.de

Examples

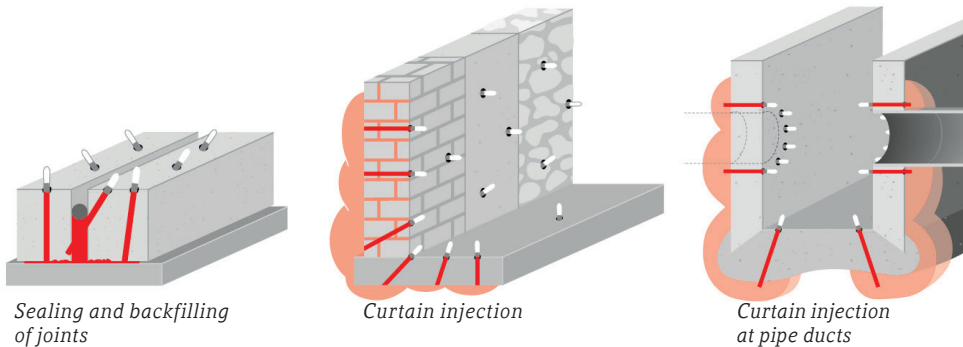

*CE Declaration of Performance 1504-5 for swellable filling with WEBAC. 240 + Bseal I

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
 © WEBAC-Chemie GmbH. Version 12/18

Injection Gels

WEBAC® 240 CE* U

Properties

WEBAC® 240

- Solid yet elastic, absorbs dynamic and mechanical stress
- Adjustable reaction
- Swells upon contact with water
- Economical material consumption
- Chloride-free
- Environmentally friendly

WEBAC® 240 + Bseal I CE*

- Polymer-reinforced
- Excellent adhesion to dry, damp and wet substrates as well as membranes and foils
- High dimensional stability
- Limited swelling
- Neglected volume loss during the drying process
- Salt reduced

WEBAC® 240 + Bseal II

- Polymer-reinforced
- Elastic, ductile without breaking
- Long pot life
- High toughness
- Limited swelling
- Neglected volume loss during drying process
- Salt reduced
- Adjustable reaction time

WEBAC®

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

*at 2% B-concentration

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
© WEBAC-Chemie GmbH. Version 12/18

Injection Gels

WEBAC® 240



WEBAC®

Technical data

WEBAC® 240							
Mixing ratio	<table border="1"> <tr> <td>Comp. A A1 : A2 20 : 1 parts by weight</td> <td>Comp. B water : B-powder-concentrate 98 : 2 parts by weight</td> </tr> <tr> <td colspan="2" style="text-align: center;">A : B 1 : 1 parts by volume</td> </tr> </table>	Comp. A A1 : A2 20 : 1 parts by weight	Comp. B water : B-powder-concentrate 98 : 2 parts by weight	A : B 1 : 1 parts by volume			
	Comp. A A1 : A2 20 : 1 parts by weight	Comp. B water : B-powder-concentrate 98 : 2 parts by weight					
A : B 1 : 1 parts by volume							
Density, 20 °C / 68 °F (ISO 2811)	<table border="1"> <tr> <td>Comp. A1</td> <td>≈ 1.2 g/cm³</td> </tr> <tr> <td>Comp. A2</td> <td>≈ 0.95 g/cm³</td> </tr> <tr> <td>Comp. B</td> <td>≈ 1.0 g/cm³</td> </tr> </table>	Comp. A1	≈ 1.2 g/cm ³	Comp. A2	≈ 0.95 g/cm ³	Comp. B	≈ 1.0 g/cm ³
Comp. A1	≈ 1.2 g/cm ³						
Comp. A2	≈ 0.95 g/cm ³						
Comp. B	≈ 1.0 g/cm ³						
Application temperature Building structure and material	> 1 °C / 34 °F						
Viscosity of mixture	<table border="1"> <tr> <td>30 °C / 86 °F ≈ 4 mPa·s</td> <td>23 °C / 73 °F ≈ 6 mPa·s</td> <td>12 °C / 54 °F ≈ 10 mPa·s</td> </tr> </table>	30 °C / 86 °F ≈ 4 mPa·s	23 °C / 73 °F ≈ 6 mPa·s	12 °C / 54 °F ≈ 10 mPa·s			
30 °C / 86 °F ≈ 4 mPa·s	23 °C / 73 °F ≈ 6 mPa·s	12 °C / 54 °F ≈ 10 mPa·s					
Reaction time at 2% B-concentration flow limit · solid	<table border="1"> <tr> <td>30 °C / 86 °F ≈ 20 s · ≈ 40 s</td> <td>20 °C / 68 °F ≈ 40 s · ≈ 75 s</td> <td>10 °C / 50 °F ≈ 100 s · ≈ 180 s</td> </tr> </table>	30 °C / 86 °F ≈ 20 s · ≈ 40 s	20 °C / 68 °F ≈ 40 s · ≈ 75 s	10 °C / 50 °F ≈ 100 s · ≈ 180 s			
30 °C / 86 °F ≈ 20 s · ≈ 40 s	20 °C / 68 °F ≈ 40 s · ≈ 75 s	10 °C / 50 °F ≈ 100 s · ≈ 180 s					
Tear strength · elongation at break 24 h (in foil), 21 °C / 70 °F (ISO 527)	≈ 0.06 N/mm ² · ≈ 220%						
Watertightness (EN 14068)	> 2 bar						
Fire behavior test (DIN 4102)	B2 according to DIN 4102-1. 6.2						
Exposure scenarios according to REACH	Assessment of industry standard application						

The specified data are values determined under laboratory conditions and are subject to a certain fluctuation. Deviations are possible in practice depending on the respective object situation.

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

*CE Declaration of Performance 1504-5 for swellable filling with WEBAC® 240 + Bseal I

Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products. © WEBAC-Chemie GmbH. Version 12/18

Injection Gels

WEBAC® 240



Technical data

		WEBAC® 240					
		5 °C 41 °F	10 °C 50 °F	15 °C 59 °F	20 °C 68 °F	25 °C 77 °F	30 °C 86 °F
flow limit	B-concentration						
	0.5%	≈ 420 s	≈ 340 s	≈ 185 s	≈ 120 s	≈ 78 s	≈ 63 s
	1.0%	≈ 250 s	≈ 185 s	≈ 102 s	≈ 70 s	≈ 44 s	≈ 34 s
	1.5%	≈ 165 s	≈ 125 s	≈ 72 s	≈ 48 s	≈ 35 s	≈ 23 s
	2.0%*	≈ 135 s	≈ 100 s	≈ 60 s	≈ 40 s	≈ 27 s	≈ 19 s
	2.5%	≈ 120 s	≈ 90 s	≈ 50 s	≈ 33 s	≈ 23 s	≈ 16 s
	5.0%	≈ 65 s	≈ 50 s	≈ 29 s	≈ 20 s	≈ 15 s	≈ 9 s
Reaction times							
solid	B-concentration						
	0.5%	≈ 660 s	≈ 540 s	≈ 330 s	≈ 195 s	≈ 140 s	≈ 110 s
	1.0%	≈ 390 s	≈ 300 s	≈ 200 s	≈ 130 s	≈ 85 s	≈ 70 s
	1.5%	≈ 270 s	≈ 210 s	≈ 140 s	≈ 90 s	≈ 70 s	≈ 45 s
	2.0%*	≈ 220 s	≈ 180 s	≈ 120 s	≈ 75 s	≈ 55 s	≈ 40 s
	2.5%	≈ 195 s	≈ 155 s	≈ 100 s	≈ 60 s	≈ 48 s	≈ 35 s
	5.0%	≈ 110 s	≈ 95 s	≈ 60 s	≈ 40 s	≈ 36 s	≈ 27 s

*National Technical Approval according to DIBt
 The specified data are values determined under laboratory conditions and are subject to a certain fluctuation.
 Deviations are possible in practice depending on the respective object situation.

WEBAC-Chemie GmbH
 Fahrenberg 22
 22885 Barsbüttel
 Germany
 Tel. +49 40 67057-0
 Fax +49 40 6703227
 info@webac.de

www.webac.de

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
 © WEBAC-Chemie GmbH. Version 12/18

Injection Gels

WEBAC® 240

WEBAC®

WEBAC-Chemie GmbH
 Fahrenberg 22
 22885 Barsbüttel
 Germany
 Tel. +49 40 67057-0
 Fax +49 40 6703227
 info@webac.de

www.webac.de

Technical data		WEBAC® 240 + Bseal I	
Mixing ratio		A1 : A2 = 20 : 1 parts by weight A : B = 1 : 1 parts by volume	
Density, 20 °C / 68 °F		≈ 1 g/cm ³	
Viscosity of mixture		23 °C / 73 °F ≈ 35 mPa·s	12 °C / 54 °F ≈ 40 mPa·s
Reaction time (100 ml mixture)	B-powder-concentration in Bseal I		
	flow limit	2.0% (≥ 0.4 kg)	
		5 °C / 41 °F	≈ 240 s
		10 °C / 50 °F	≈ 75 s
20 °C / 68 °F	≈ 45 s		
solid	2.0% (≥ 0.4 kg)		
	5 °C / 41 °F	≈ 260 s	
	10 °C / 50 °F	≈ 105 s	
20 °C / 68 °F	≈ 60 s		
Tear strength · elongation at break 24 h (in foil), 21 °C / 70 °F (ISO 527)		≈ 0.2 N/mm ² · ≈ 450%	

Technical data		WEBAC® 240 + Bseal II				
Mixing ratio		A1 : A2 = 20 : 1 parts by weight A : B = 1 : 1 parts by volume				
Density, 20 °C / 68 °F		≈ 1 g/cm ³				
Viscosity of mixture		23 °C / 73 °F ≈ 30 mPa·s	12 °C / 54 °F ≈ 35 mPa·s			
Reaction time (100 ml mixture)	B-powder-concentration in Bseal II					
	flow limit	5% ≥ 1 kg	2% ≥ 0.4 kg	1% ≥ 0.2 kg	0.5% ≥ 0.1 kg	
		5 °C / 41 °F	≈ 75 s – 120 s	≈ 160 s – 250 s	≈ 300 s – 380 s	≈ 680 s – 800 s
		10 °C / 50 °F	≈ 35 s – 60 s	≈ 60 s – 100 s	≈ 140 s – 200 s	≈ 310 s – 420 s
	20 °C / 68 °F	≈ 8 s – 28 s	≈ 15 s – 45 s	≈ 35 s – 85 s	≈ 70 s – 170 s	
	solid	5% ≥ 1 kg	2% ≥ 0.4 kg	1% ≥ 0.2 kg	0.5% ≥ 0.1 kg	
5 °C / 41 °F		≈ 110 s – 220 s	≈ 230 s – 290 s	≈ 400 s – 500 s	≈ 850 s – 980 s	
10 °C / 50 °F		≈ 60 s – 85 s	≈ 100 s – 170 s	≈ 200 s – 300 s	≈ 450 s – 580 s	
20 °C / 68 °F	≈ 30 s – 50 s	≈ 40 s – 55 s	≈ 70 s – 105 s	≈ 120 s – 250 s		
Tear strength · elongation at break 24 h (in foil), 21 °C / 70 °F (ISO 527)		≈ 0.1 N/mm ² · > 500%				

*CE Declaration of Performance 1504-5 for swellable filling with WEBAC® 240 + Bseal I
 The specified data are values determined under laboratory conditions and are subject to a certain fluctuation.
 Deviations are possible in practice depending on the respective object situation.

Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
 © WEBAC-Chemie GmbH. Version 12/18

Injection Gels

WEBAC® 240



Preparatory work

- ▶ See WEBAC Brochure Curtain Injection



Curtain Injection



Mixing

Mixing of component A

- The containers of component A are provided according to the required mixing ratio
- Empty the smaller container of component A2 completely into the larger container of component A1
- Mix both components via stirring while pouring until homogeneous

Mixing of component B

WEBAC® 240

- Dissolve B-powder-concentrate in clean tap water in a clean plastic bucket by thoroughly stirring it with a stainless steel stirrer (by adapting the filling level of component B to that of component A it is easy to assess the required amount of water)

WEBAC® 240 + Bseal I/Bseal II

- Add the B-powder-concentrate to the container of component Bseal I/II and stir until it has fully dissolved

Application by 2C pump (stainless steel)

- Prepared components A and B are delivered at a mixing ratio of 1 : 1 from respective containers directly with a 2C pump (stainless steel)
- The components are mixed homogeneously in the mixing head



Application instruction

- Only use stainless steel, wooden or plastic stirrer for mixing
- All prepared components must be used immediately
- Only use pure WEBAC material without any residues of cleaning agents or other impurity
- The reaction speed is influenced by the temperature of the material and the building structure – higher temperatures accelerate, lower temperatures slow down the reaction

Coloring

- WEBAC Injection Gels can be colored with **WEBAC® F200** to monitor the water displacement, the material distribution as well as to identify any gel leakage
- To color the injection gel, mix approx. 1% (referring to **component A**) of the blue color agent **WEBAC® F200** into **component A**
- The color intensity of the gel will decrease gradually

Due to the high adhesive power of component B of **WEBAC® 240 + Bseal I/ Bseal II** the filter of the suction hose must be regularly checked for material residues and lumps and be cleaned if necessary when applying large quantities. Upon completion of the injection process, the 2C pump must be thoroughly rinsed with plenty of water (at least 20 liters of fresh, clean water per component) to prevent clogging within the pump system and the suction hoses.

WEBAC®

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

▶ Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
© WEBAC-Chemie GmbH. Version 12/18

Injection Gels

WEBAC® 240 CE* U



Application

- The injection pressure depends on the nature and condition of the structure
- Inject the injection gel from bottom to top, beginning at the lowest drill hole level
- Continue the injection until injection gel starts leaking from the adjacent packers

For detailed information, refer to the **WEBAC Brochure Curtain Injection**.



Final work and cleaning

- The packers can be removed immediately after gel formation
- Cured gel must be removed from the drill holes/drill hole walls down to about 10 cm deep and the drill holes must be filled with non-shrinking mortar
- Clean the injection pump and the equipment exclusively with water
- Gelled residues must be removed from the equipment mechanically immediately after use
- Observe the technical data sheet of the injection pump and cleaners used
- For detailed information refer to the operating manual of the injection pump used



Occupational safety

The safety regulations of the industrial trade associations and the WEBAC Safety Data Sheets are to be observed at all times when working with this product. Safety data sheets according to Regulation (EC) No. 1907/2006 (REACH) must be accessible to all persons responsible for occupational safety, health protection and the handling of materials. For further information, please see the separate information sheet "Occupational Safety" in our product catalog or www.webac-grouts.com.



Waste disposal

In Germany, empty containers can be disposed of via "Interseroh Dienstleistungs GmbH" observing the respective terms and conditions. It is not possible to dispose of containers at production facilities or delivery warehouses. For more detailed information, please see the separate information sheet "Information on the disposal and return of WEBAC packaging" in our product catalog or www.webac-grouts.com and the safety data sheets.

WEBAC®

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

*CE Declaration of Performance 1504-5 for swellable filling with WEBAC® 240 + Bseal I

► Technical Information

Injection Gels

WEBAC® 240 CE* U

WEBAC®

Product data

Application	Injection by 2C pump (WEBAC® IP 2K-F1)				
Material consumption (orientation value)	Curtain injection	≈ 20 – 60 kg/m ² (corresponds ≈ 10–30 kg gel-concentrate)			
	Sealing of building	≈ 20 kg/m ² at 50 cm wall thickness			
	Damp proof course (dpc)	≈ 1.5–2 kg/m per 10 cm wall thickness			
Packing	Comp. A1	Comp. A2	Comp. B	Bseal I	Bseal II
	21.5 kg	1.05 kg	1.0 kg 0.4 kg 0.2 kg	20 kg	20 kg
	F200 1 kg				
Storage	<ul style="list-style-type: none"> • Between 5 °C / 41 °F and 25 °C / 77 °F • Protect WEBAC. 240 component Bseal I/II from frost • Protect from moisture and light • In original, sealed containers 				
Compatibility/Resistance	<ul style="list-style-type: none"> • Resistant to diluted acids and salts damaging the structure • Resistant to alternating frost and thaw • Reacted gels are insoluble in water and fuels 				

WEBAC-Chemie GmbH
 Fahrenberg 22
 22885 Barsbüttel
 Germany
 Tel. +49 40 67057-0
 Fax +49 40 6703227
 info@webac.de

www.webac.de

Test certificates

WEBAC. 240

- National Technical Approval: Injection gel for curtain injection
- Certificate of Conformity for use as: Curtain injections
- Test certificate* according to KTW recommendations: D1 (large sealing of surfaces)

WEBAC. 240 + Bseal I

- Declaration of Performance according to Construction Products Regulation
- Test certificate* according to KTW recommendations: D1/D2 (large sealing of surfaces/ other sealants and adhesives)

* for drinking water

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
 © WEBAC-Chemie GmbH. Version 12/18