


WEBAC® Plug/Ring/Flange



► WEBAC® Plug/Ring/Flange are swellable tie points used for sealing intersections caused by form work anchors.


Range of application

- Sealing of intersections/tie points with swellable sealing rings and plugs in concrete and reinforced concrete construction
- Suitable for:
 - Fiber reinforced concrete pipes
 - Plastic pipe spacers
 - Foundation earth electrodes

Properties

- Easy and economical solution
- Sealing with a simple hammer blow
- No gluing
- Temperature- and weather-independent
- Active swelling sealant
- Also suitable in case of negative pressing water

Example

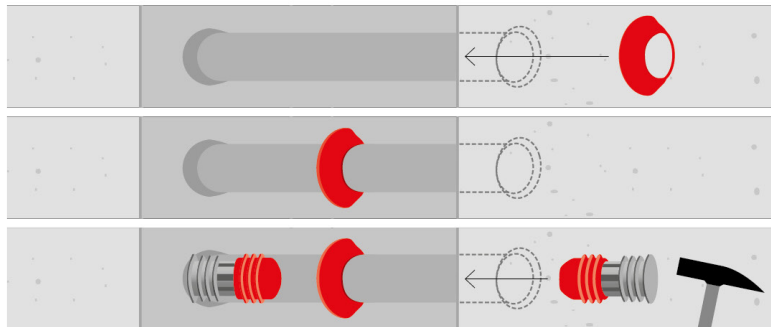

Installation of WEBAC® Flange, Ring and Plug

Technical data

Water pressure

Values

tested with 5 bar

The specified data are values determined under laboratory conditions and are subject to a certain fluctuation. Deviations are possible in practice depending on the respective object situation.

WEBAC-Chemie GmbH
 Fahrenberg 22
 22885 Barsbüttel
 Germany
 Tel. +49 40 67057-0
 Fax +49 40 6703227
 info@webac.de




www.webac.de

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
 © WEBAC-Chemie GmbH. Version 12/18

Special Construction Products

WEBAC® Plug/Ring/Flange

Products		Dimension
WEBAC. Plug		Ø 22, 24, 26 mm
WEBAC. Ring		Ø 24 mm
WEBAC. Flange		Ø 10, 12, 17, 24, 31, 39 mm

WEBAC-Chemie GmbH
 Fahrenberg 22
 22885 Barsbüttel
 Germany
 Tel. +49 40 67057-0
 Fax +49 40 6703227
 info@webac.de

www.webac.de

Product data		Dimension		Unit
Installation		<ul style="list-style-type: none"> Mount WEBAC. Flange or WEBAC. Ring for exterior sealing purposes to the plastic pipe or the fiber-reinforced cement pipe during the formwork operations The interior sealing process takes place following the formwork by simply knocking the WEBAC. Plugs into the pipe 		
	Packing	WEBAC. Plug	Ø 22 mm	100
Ø 24 mm			100	
Ø 26 mm			100	
WEBAC. Ring		Ø 24 mm	100	
WEBAC. Flange		Ø 10 mm	100	
		Ø 12 mm	100	
		Ø 17 mm	100	
	Ø 24 mm	100		
	Ø 31 mm	50		
Ø 39 mm	50			
Storage	Protect from mechanical damage and moisture			

Test certificate

- Test Report of watertightness of tie points



Occupational safety/
waste disposal

[webac-grouts.com/
downloads](http://webac-grouts.com/downloads)

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
 © WEBAC-Chemie GmbH. Version 12/18