

Special Construction Products

WEBAC® Polymer Swelling Tape



- ▶ WEBAC® Polymer Swelling Tapes are permanently dimensionally stable and designed for sealing of construction joints as well as joints in precast concrete units.


Range of application

- Sealing of construction joints against soil moisture, non-pressing and pressing water in concrete and reinforced concrete construction
- Sealing of joints in precast concrete unit construction, tubing construction
- Repair of expansion joints
- Sealing of pipe ducts

Properties

- Reversible swelling behavior
- Permanent dimensional stability
- Excellent chemical resistance
- Flexible

Example

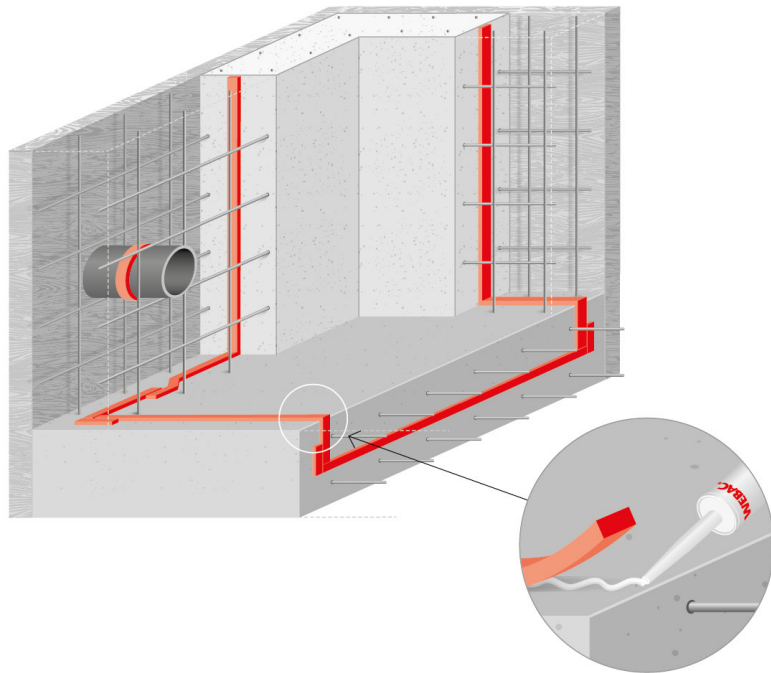

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

▶ Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
© WEBAC-Chemie GmbH. Version 12/18

Special Construction Products

WEBAC® Polymer Swelling Tape

Technical data	Values	
	Rectangular profile	Rectangular profile SW*
Profile shape	20 x 5 mm 20 x 10 mm 20 x 20 mm 30 x 30 mm	
Water pressure	Tested with 5 bar	
Concrete cover	Minimum 8 cm	

* salt water

WEBAC-Chemie GmbH
 Fahrenberg 22
 22885 Barsbüttel
 Germany
 Tel. +49 40 67057-0
 Fax +49 40 6703227
 info@webac.de

www.webac.de

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products. © WEBAC-Chemie GmbH. Version 12/18


Special Construction Products

WEBAC® Polymer Swelling Tape


🕒 Installation

- Install **WEBAC® Polymer Swelling Tape** on-center or with at least 8 cm concrete cover towards the waterside in the construction joint
- In case of construction joints > 60 cm width: install at a distance of approx. 25 cm from the waterside
- Installation with **WEBAC. Contact Adhesive** (Ill. 1) or mechanical fastening (steel nails without head)
- Install swelling tape close-lyed to the substrate (nailing or gluing)
- Prevent moving or floating during concreting
- When connecting swelling tapes, their ends must overlap by approx. 5 cm and be close to each other, gaps must be avoided (see Ill. 2)
- In case of corner connections: install swelling tapes butt-jointed and overlap swelling tape section approx. 10 cm as corner guard (Ill. 3)


Substrates must be solid, clean, dry and free of brittle and separative substances (oils, grease, etc.), cement paste layers and rust structures. The surface should be even.

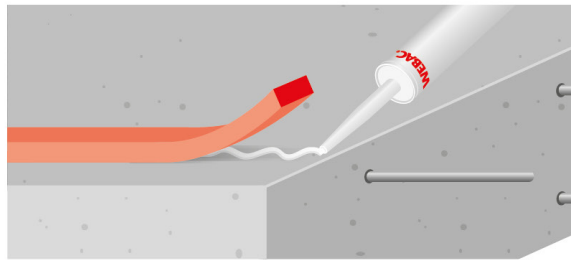

Ill. 1: Gluing with **WEBAC. Contact Adhesive**

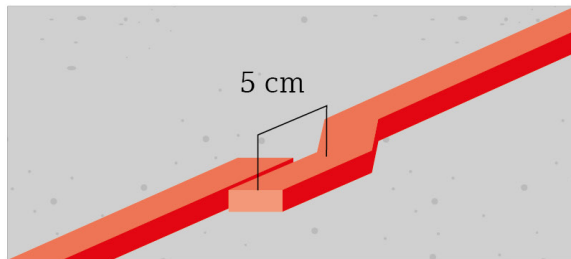

Ill. 2: Connection

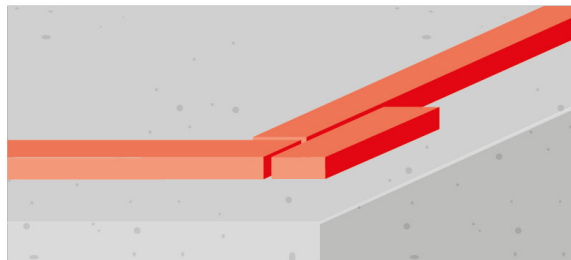

Ill. 3: Horizontal corner connection

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
© WEBAC-Chemie GmbH. Version 12/18

Special Construction Products

WEBAC® Polymer Swelling Tape

Product data			
Installation	<ul style="list-style-type: none"> • Installation with WEBAC Contact Adhesive • Mechanical fastening 		
Packing	Rectangular profile	Dimensions	Unit
		20 x 5 mm	5 x 10 m
	Rectangular profile SW*	20 x 10 mm	9 x 10 m
		20 x 20 mm	3 x 5 m
30 x 30 mm	3 x 5 m		
Storage	Prevented from mechanical stress and moisture		
Compatibility/Resistance	Resistent to acids, alkalis and most aqueous solutions		

* salt water

WEBAC-Chemie GmbH
 Fahrenberg 22
 22885 Barsbüttel
 Germany
 Tel. +49 40 67057-0
 Fax +49 40 6703227
 info@webac.de

www.webac.de

Test certificates

- National Test Certificate
- Test Report: Behaviour of swelling tapes when immersed in saline water of various concentration

Occupational safety

The safety regulations of the industrial trade associations and the WEBAC Safety Data Sheets are to be observed at all times when working with this product. Safety data sheets according to Regulation (EC) No. 1907/2006 (REACH) must be accessible to all persons responsible for occupational safety, health protection and the handling of materials. For further information, please see the separate information sheet "Occupational Safety" in our product catalog or www.webac-grouts.com.

Waste disposal

In Germany, empty containers can be disposed of via "Interseroh Dienstleistungs GmbH" observing the respective terms and conditions. It is not possible to dispose of containers at production facilities or delivery warehouses. For more detailed information, please see the separate information sheet "Information on the disposal and return of WEBAC packaging" in our product catalog or www.webac-grouts.com and the safety data sheets.

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
 © WEBAC-Chemie GmbH. Version 12/18