

## Silicate Injection Grouts

# WEBAC® 2100



- ▶ WEBAC® 2100 is an extremely low-viscosity silicate injection solution for post-construction damp proof courses (dpc). It is specially designed for higher wall thicknesses.


### Range of application

- Post-construction damp proof course (dpc) against capillary rising moisture

### Properties

- Extremely low viscosity
- Capillary contraction
- Water repellent

### Example

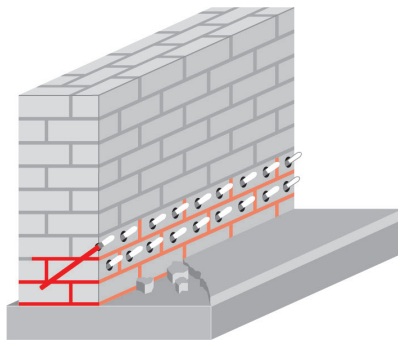

*Damp proof course (dpc) in masonry*

WEBAC-Chemie GmbH  
Fahrenberg 22  
22885 Barsbüttel  
Germany  
Tel. +49 40 67057-0  
Fax +49 40 6703227  
info@webac.de

[www.webac.de](http://www.webac.de)

## ▶ Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.  
© WEBAC-Chemie GmbH. Version 03/2020/2

Silicate Injection Grouts  
**WEBAC® 2100**

Technical data	Values
Density, 20 °C / 68 °F (ISO 2811)	≈ 1.1 g/cm <sup>3</sup>
Application temperature Building structure and material	> 5 °C / 41 °F
Viscosity (ISO 3219)	<b>23 °C / 73 °F</b> ≈ 10 mPa·s
Exposure scenarios according to REACH	Assessment of industry standard application

The specified data are values determined under laboratory conditions and are subject to a certain fluctuation. Deviations are possible in practice depending on the respective object situation.

WEBAC-Chemie GmbH  
 Fahrenberg 22  
 22885 Barsbüttel  
 Germany  
 Tel. +49 40 67057-0  
 Fax +49 40 6703227  
 info@webac.de

[www.webac.de](http://www.webac.de)

► **Technical Information**

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.  
 © WEBAC-Chemie GmbH. Version 03/2020/2

## Silicate Injection Grouts

# WEBAC® 2100



### Preparatory work

#### Structural analysis before masonry injection:

- Masonry condition
- Moisture condition
- Masonry structure
- Salt contamination

#### This provides following information:

- Practicability of injection
- Choice of drill hole packers
- Positioning of drill holes

► See **WEBAC Brochure Sealing of Masonry**



Sealing of Masonry



### Mixing

#### Application by 1C pump

- Material is ready to use
- Stir briefly before use



### Application instruction

- Only use pure WEBAC material without any residues of cleaning agents or other impurity



### Application

#### Damp proof course (dpc)

- The injection pressure depends on the nature and condition of the building structure
- Inject the material from bottom to top, beginning at the lower grid level
- Continue the injection until resin leaks out from the masonry and/or from the adjacent packers. This is necessary to get an even material distribution



### Final work and cleaning

- Once the material has cured remove the packers
- Clean and close the drill holes with suitable non-shrinking mortar
- Rinse injection pump with water or **WEBAC® Cleaner A**
- For detailed information refer to the operating manual of the injection pump used

WEBAC-Chemie GmbH  
Fahrenberg 22  
22885 Barsbüttel  
Germany  
Tel. +49 40 67057-0  
Fax +49 40 6703227  
info@webac.de

[www.webac.de](http://www.webac.de)

## Silicate Injection Grouts

# WEBAC® 2100

### Product data

<b>Application</b>	<ul style="list-style-type: none"> <li>• Injection by 1C pump</li> </ul>	
<b>Material consumption</b> ≈ 1–2.5 kg/m masonry per 10 cm wall thickness, depending on the absorbency	<b>Wall thickness</b>	<b>Consumption</b>
	24 cm	3 – 5 kg
	36 cm	4 – 8 kg
	50 cm	7 – 12 kg
	80 cm	11 – 16 kg
	100 cm	15 – 20 kg
	120 cm	18 – 25 kg
<b>Packing</b>	<b>Unit</b> 215 kg 10.5 kg	
<b>Storage</b>	<ul style="list-style-type: none"> <li>• Between 5 °C / 41 °F and 30 °C / 86 °F</li> <li>• Protect from moisture</li> <li>• In original, sealed containers</li> </ul>	
<b>Compatibility/Resistance</b>	<ul style="list-style-type: none"> <li>• Resistant to common chemical loads in building structures</li> </ul>	

**WEBAC-Chemie GmbH**  
 Fahrenberg 22  
 22885 Barsbüttel  
 Germany  
 Tel. +49 40 67057-0  
 Fax +49 40 6703227  
 info@webac.de

[www.webac.de](http://www.webac.de)

### Occupational safety

The safety regulations of the industrial trade associations and the WEBAC Safety Data Sheets are to be observed at all times when working with this product. Safety data sheets according to Regulation (EC) No. 1907/2006 (REACH) must be accessible to all persons responsible for occupational safety, health protection and the handling of materials. For further information, please see the separate information sheet "Occupational Safety" in our product catalog or [www.webac-grouts.com](http://www.webac-grouts.com).

### Waste disposal

In Germany, empty containers can be disposed of via "Interseroh Dienstleistungs GmbH" observing the respective terms and conditions. It is not possible to dispose of containers at production facilities or delivery warehouses. For more detailed information, please see the separate information sheet "Information on the disposal and return of WEBAC packaging" in our product catalog or [www.webac-grouts.com](http://www.webac-grouts.com) and the safety data sheets.

## ► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.  
 © WEBAC-Chemie GmbH. Version 03/2020/2