

Special Construction Products

## WEBAC® Injection Tubes



### Range of application

- Sealing of construction joints in concrete construction (National Test Certificate)
- Structural, elastic or bonding installation of concrete building structures
- Additional sealing of joint tapes or joint plates

### Properties

- Easy and quick installation at all levels and angles
- Minimum injection resin consumption due to optimal tube sizes

### Test certificates

#### WEBAC® Injection Tube AB

- National Test Certificate in combination with WEBAC® 1403P/1405


#### WEBAC® Injection Tube Type 2

- National Test Certificate in combination with WEBAC® 1405

WEBAC-Chemie GmbH  
Fahrenberg 22  
22885 Barsbüttel  
Germany  
Tel. +49 40 67057-0  
Fax +49 40 6703227  
info@webac.de

[www.webac.de](http://www.webac.de)

### Example

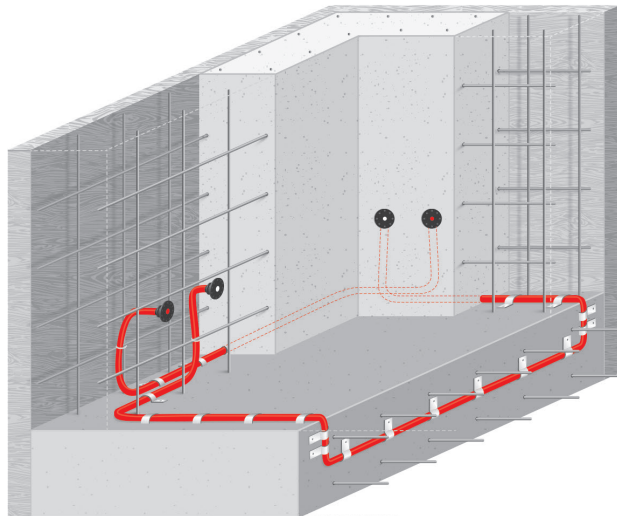

## ► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.  
© WEBAC-Chemie GmbH. Version 03/2024

Special Construction Products

## WEBAC® Injection Tubes

### WEBAC® Injection Tube AB



Perforated plastic tube

∅ internal: 6 mm, ∅ external: 12 mm

National Test Certificate in combination with WEBAC® 1403P and WEBAC® 1405

### WEBAC® Injection Tube Type 2



Perforated tube with double fabric membrane

∅ internal: 6 mm, ∅ external: 12 mm


National Test Certificate in combination with WEBAC® 1405

### Accessories

**Injection- and ventilation adapter with sealing cap**



**Shuttering packer K**



**Tube connector**



**Cone screw plug**



**Clamps with hole**



**Plug-in clamp**



### Thumb rule for material consumption

**Tube and other accessories**  
(referring to 10 linear meters)

<b>WEBAC® Injection Tube</b>	10 m
<b>Injection- and ventilation adapter with cone screw plugs and sealing caps or shuttering packers K</b>	2 pcs
<b>Clamps with hole additionally nails or screws or plug-in clamps</b>	68 pcs
<b>Injection resin</b> (reference values only):	
Filling of tube volume	≈ 0.2 kg
Injection	≈ 1–3 kg

WEBAC-Chemie GmbH  
Fahrenberg 22  
22885 Barsbüttel  
Germany  
Tel. +49 40 67057-0  
Fax +49 40 6703227  
info@webac.de

[www.webac.de](http://www.webac.de)


## Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.  
© WEBAC-Chemie GmbH. Version 03/2024


## WEBAC® Injection Tubes

### Installation


- Preferably, install **WEBAC® Injection Tube** centrally in the building component (III. 1)
- Max. length per installation section: 10 m
- In case of very high wall thicknesses ( $d > 60$  cm), install the tube at a distance of  $\approx 25$  cm from the waterside (for tube installation in corners, see III. 2)
- Keep to minimum concrete cover (5 cm)
- Fasten with clamps/plug-in clamps at least every 15 cm, halve fastening distance on uneven ground and when changing direction
- Fastening in full contact with the substrate
- Avoid shifting or floating during concreting




III. 1



III. 2

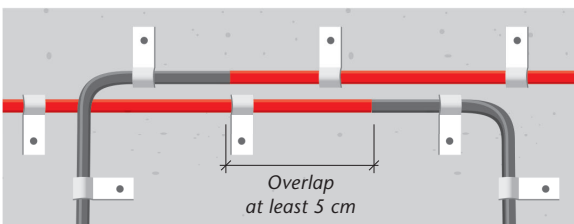

III. 3a

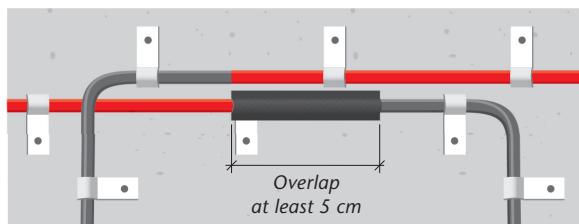

III. 3b

- Either plug end pieces (with sealing cap) onto the tube ends or fasten the tube with shuttering packers
- At impacts, the ends of the injection tubes are overlapped by  $\approx 5$  cm (III. 3a), whereby in the case of **WEBAC® Injection Tube Type 2** (III. 3b) one of the two tubes is taped in this area to prevent premature penetration of the injection resin into the next injection section

Substrates must be solid, clean, dry and firm, free of brittle and separative substances (oils, grease, etc.) and cement paste layers and rust structures. The surface must be even.

### Injection

- Check the injection hose for free flow (compressed air or water)
- Fill the injection section with injection resin via injection packer until injection resin emerges at the associated hose end (venting of the hose).
- Better results are achieved at constantly low pressure than at high pressure
- Max. injection pressure: 80 bar
- Carry out a secondary injection within the pot life of the injection resin

WEBAC-Chemie GmbH  
Fahrenberg 22  
22885 Barsbüttel  
Germany  
Tel. +49 40 67057-0  
Fax +49 40 6703227  
info@webac.de

[www.webac.de](http://www.webac.de)

Special Construction Products

# WEBAC® Injection Tubes

## Product data

<b>Delivery form</b>	<b>Unit</b> 100 m
<b>Storage</b>	<ul style="list-style-type: none"><li>• Prevent from mechanical damage</li></ul>

## Occupational safety

The safety regulations of the industrial trade associations and the WEBAC Safety Data Sheets are to be observed at all times when working with this product. Safety data sheets according to Regulation (EC) No. 1907/2006 (REACH) must be accessible to all persons responsible for occupational safety, health protection and the handling of materials. For further information, please see the separate information sheet "Occupational Safety" in our product catalog or [www.webac.com](http://www.webac.com).

## Waste disposal

It is not possible to dispose of containers at production facilities or delivery warehouses. For more detailed information, please see the separate information sheet "Disposal Notes" in our product catalog or [www.webac.com](http://www.webac.com) and the safety data sheets.

WEBAC-Chemie GmbH  
Fahrenberg 22  
22885 Barsbüttel  
Germany  
Tel. +49 40 67057-0  
Fax +49 40 6703227  
[info@webac.de](mailto:info@webac.de)

[www.webac.de](http://www.webac.de)

## ► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.  
© WEBAC-Chemie GmbH. Version 03/2024