

Silicate Injection Resins

WEBAC® SIL ACC1

- ▶ Accelerator that shortens the reaction time of WEBAC silicate systems

Range of application

- Accelerates the reaction of **WEBAC® SILcompact**, **WEBAC® SILcompact M**, **WEBAC® SILcompact M thix** and **WEBAC® SILform**

Application instruction

- Shake well before use
- Add accelerator amount referring to total volume (component A + B)
- Mix into component A immediately before use



WEBAC-Chemie GmbH
 Fahrenberg 22
 22885 Barsbüttel
 Germany
 Tel. +49 40 67057-0
 Fax +49 40 6703227
 info@webac.de
 www.webac-grouts.com

www.webac.de

Reaction time

of **WEBAC® SILcompact** depending on amount of **WEBAC® SIL ACC1** added at 10 °C/50 °F and 23 °C/73 °F

- Start of reaction
- End of Reaction
- II Fault tolerance

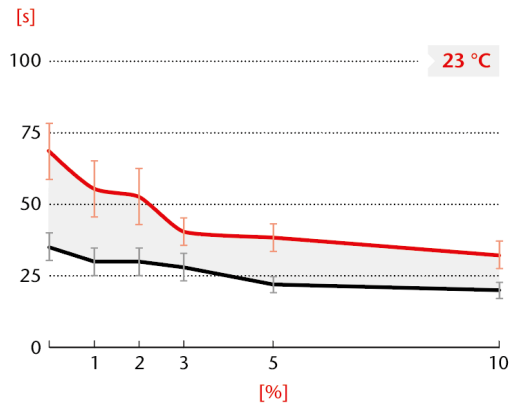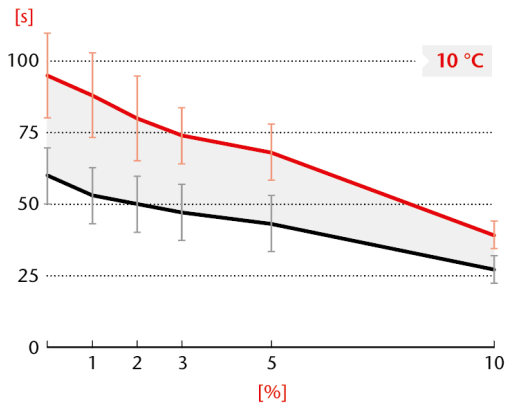

Technische Information Technical Information



Silicate Injection Resins

WEBAC® SIL ACC1

Reaction time

of WEBAC® SILform depending on amount of WEBAC® SIL ACC1 added at 10 °C/50 °F and 23 °C/73 °F

- Start of reaction
- End of Reaction
- II Fault tolerance

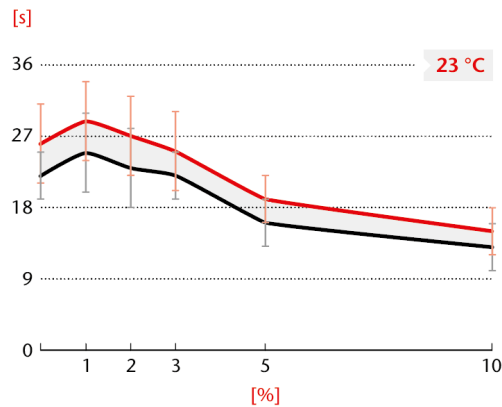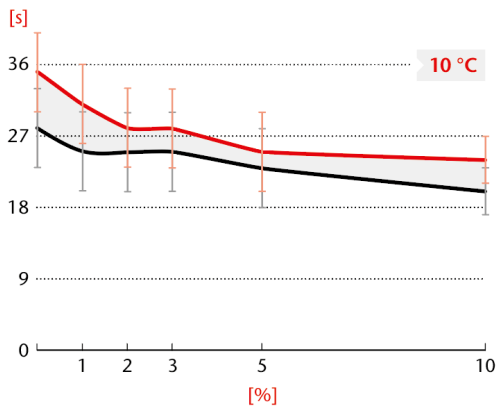

WEBAC-Chemie GmbH
 Fahrenberg 22
 22885 Barsbüttel
 Germany
 Tel. +49 40 67057-0
 Fax +49 40 6703227
 info@webac.de
 www.webac-grouts.com

www.webac.de