

Injection Pumps

WEBAC® IP 2K-AG CE

- WEBAC® IP 2K-AG is an air driven, stainless steel 2C double piston pump for applying WEBAC acrylic gels. The high dosing accuracy and the special mixing head enable safe working.

Range of application


- Curtain injection
- Gel injection within the structure
- Post-construction damp proof course (dpc)
- Stabilization and sealing of foundation soil
- Soil solidification

Suitable for

- Acrylate gels

Properties

- Mixing ratio 1 : 1
- Robust design, suitable for construction sites
- Adjustable pressure
- High dosing accuracy
- Compressed air-operated
- Pump made of stainless steel
- High delivery rate
- Separate flushing pump
- Easy to clean and maintain

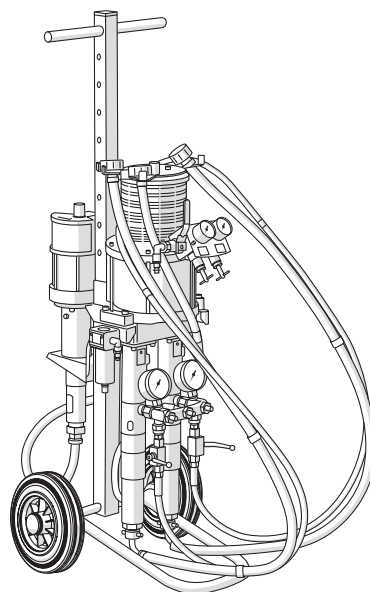

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
© WEBAC-Chemie GmbH. Version 03/2022

Injection Pumps

WEBAC® IP 2K-AG CE

Technical data	Values
Pressure ratio	≈ 25 : 1
Max. flow rate at free flow	≈ 14 l/min
Flow rate	≈ 80 cm ³ /double stroke
Max. inlet pressure/ safety valve	8 bar
Max. allowed working pressure	200 bar
Air requirement	≈ 300 – 400 l/min
Max. material temperature	≈ 80 °C / 176 °F
Dimensions (LxWxH)	≈ 45 x 31 x 83 cm
Weight	≈ 45 kg

Operation

For the operation of the injection pump, see the pump manual.

Cleaning

- Clean the injection pump and the equipment exclusively with water (when using BsealI, **WEBAC® Cleaner A** is recommended for comp. B)
- For detailed information refer to the operating manual of the injection pump

Storage

- Always store the injection pump in an upright position
- Fill the cleaned pump system with (water-free) hydraulic oil in case of longer non-operating periods

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products. © WEBAC-Chemie GmbH. Version 03/2022

Injection Pumps

WEBAC® IP 2K-AG CE

Overview: Range of application

		Sealing of Masonry	Gel Injection (Curtain Injection)	Stabilization of Structures	Crack Repair	Sealing of Joints	Monument Conservation	Sealing of Foundation Pits	Sewer Repair	Soil Solidification
1C pumps	WEBAC® IP EasyPro	✓		✓	✓	✓	✓		✓	✓
	WEBAC® IP 1K-F4	✓		✓	✓	✓	✓		✓	✓
	WEBAC® IP 1K-F3	✓		✓	✓	✓	✓		✓	✓
	WEBAC® HP 100	✓		✓	✓		✓			
	WEBAC® HP 250	✓		✓	✓		✓			
	WEBAC® HEP 1001	✓		✓	✓		✓			
2C pumps	WEBAC® IP 2K-AG	✓	✓			✓		✓	✓	✓
	WEBAC® IP 2K-PU	✓		✓			✓	✓	✓	✓
	WEBAC® HP 50 2K	✓		✓		✓	✓			

Occupational safety

The safety regulations of the industrial trade associations and the WEBAC Safety Data Sheets are to be observed at all times when working with this product. Safety data sheets according to Regulation (EC) No. 1907/2006 (REACH) must be accessible to all persons responsible for occupational safety, health protection and the handling of materials. For further information, please see the separate information sheet "Occupational Safety" in our product catalog or www.webac-grouts.com.

Waste disposal

In Germany, empty containers can be disposed of via "Interseroh Dienstleistungs GmbH" observing the respective terms and conditions. It is not possible to dispose of containers at production facilities or delivery warehouses. For more detailed information, please see the separate information sheet "Information on the disposal and return of WEBAC packaging" in our product catalog or www.webac-grouts.com and the safety data sheets.

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
© WEBAC-Chemie GmbH. Version 03/2022