

Injection Accessories

WEBAC® Ram Injection Lances

Range of Application

- Consolidation grouting
- Filling of cavities/voids
- Stabilization measures
 - Foundation stabilization
 - Increase load-bearing capacity


Suitable for

- PU injection resins
- Acrylate gels
- Silicate injection resins

Properties

- Easy handling
- Can be assembled flexibly
- Setting depth up to 10 m (max.)

Example

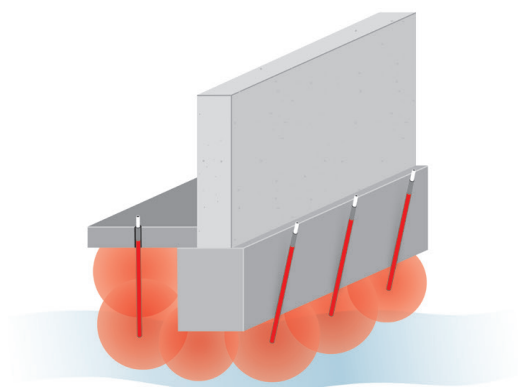

Subsoil stabilization

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de











Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
© WEBAC-Chemie GmbH. Version 01/2025

Injection Accessories

WEBAC® Ram Injection Lances

Products

Separated tip for connecting element without hole  <ul style="list-style-type: none"> • Ø 13 mm 	Basic element with hole and cone-shaped tip  <ul style="list-style-type: none"> • Ø 13 mm 	Coupling  <ul style="list-style-type: none"> • Ø 13 mm IT ¼"
Connecting element without hole for separated tip  <ul style="list-style-type: none"> • Ø 13 mm • Length 500 mm, 1,000 mm 	Connecting element with hole  <ul style="list-style-type: none"> • Ø 13 mm • Length 500 mm, 1,000 mm 	Steel packer  <ul style="list-style-type: none"> • Ø 18 x 170 mm
Ramming tool  <ul style="list-style-type: none"> • G ¼" for basic- and connecting element • M10x1 for steel packer 	Mounting tool for caulking hammer 	Screw nipple DN10  <ul style="list-style-type: none"> • IT ¼" for basic and connecting element
High-pressure button head fitting  <ul style="list-style-type: none"> • M10x1 for steel packer • IT ¼" for basic and connecting element 		

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
© WEBAC-Chemie GmbH. Version 01/2025

Injection Accessories

WEBAC® Ram Injection Lances

Occupational Safety

The safety regulations of the industrial trade associations and the WEBAC Safety Data Sheets are to be observed at all times when working with this product. Safety data sheets according to Regulation (EC) No. 1907/2006 (REACH) must be accessible to all persons responsible for occupational safety, health protection and the handling of materials. For further information, please see the separate information sheet "Occupational Safety" in our product catalog or www.webac-grouts.com.

Waste Disposal

In Germany, empty containers can be disposed of via "Interzero Circular Solutions Germany GmbH" observing the respective terms and conditions. It is not possible to dispose of containers at production facilities or delivery warehouses. For more detailed information, please see the separate information sheet "Disposal Notes" in our product catalog or www.webac-grouts.com and the safety data sheets.

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
© WEBAC-Chemie GmbH. Version 01/2025