

## PU Injection Foam Resins

**WEBAC® 157** **CE**



### Range of application

- Sealing of:
  - Junctions between cast in-situ concrete and precast units
  - Semiprecast concrete elements joints
  - Separation joints in buildings
  - Expansion joint tapes with stainless steel rails
  - Pipe ducts
  - Floor/wall connection
- Filling of cavities/voids in masonry
- Sealing of anchor heads in special civil engineering

### Properties

- Polyurethan-based injection foam resin
- Fine pored and elastic foam structure
- Low expansion pressure
- Adjustable reaction time (accelerator **WEBAC® B15**)


WEBAC-Chemie GmbH  
Fahrenberg 22  
22885 Barsbüttel  
Germany  
Tel. +49 40 67057-0  
Fax +49 40 6703227  
info@webac.de

### Test certificates


- Test certificate according to KTW recommendations: D1 (large-surface sealants)
- Environmental Product Declaration (EPD)
- List of chemical resistance

[www.webac.de](http://www.webac.de)

### Examples

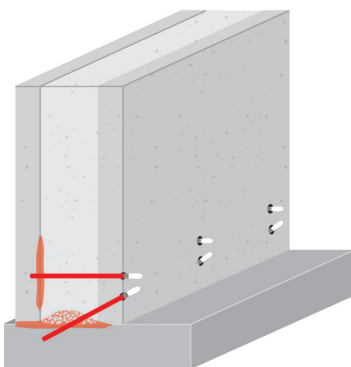

*Sealing of semi-precast concrete element joints*

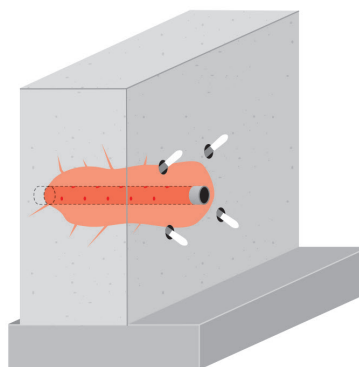

*Sealing of pipe ducts*

## Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.  
© WEBAC-Chemie GmbH. Version 03/2024

## PU Injection Foam Resins

**WEBAC® 157** **CE**

Technical data	Values							
Mixing ratio	1 : 1 parts by volume							
Bulk density foam	≈ 45 kg/m <sup>3</sup>							
Density, 20 °C (DIN ISO 2811)	Comp. A	≈ 0.98 g/cm <sup>3</sup>						
	Comp. B	≈ 1.1 g/cm <sup>3</sup>						
Pot life (WEBAC test specification based on DIN ISO 9514)		30 °C > 120 min		23 °C > 120 min		12 °C ≈ 120 min		
Application temperature Building structure and material	> 5 °C							
Viscosity of mixture (WEBAC test specification based on DIN ISO 3219)		23 °C ≈ 400 mPa·s		12 °C ≈ 500 mPa·s				
Foam reaction with 10% water Start : End	30 °C ≈ 15 s		20 °C ≈ 20 s		12 °C ≈ 25 s		5 °C ≈ 40 s	
		≈ 70 s		≈ 80 s		≈ 90 s		≈ 120 s
Expansion with 10% water (DIN EN 14406)	≈ 15-times							
Watertightness (DIN EN 14068)	2 bar							
GISCODE	PU40							
EPD	EPD-FEI20220021-IBG1-EN							
Exposure scenarios according to REACH	Assessment of industry standard application							

The specified data are values determined under laboratory conditions and are subject to a certain fluctuation. Deviations are possible in practice depending on the respective object situation.

## PU Injection Foam Resins

# WEBAC® 157 CE

### Preparatory work

#### Structural analysis:

- Preparation of a building condition analysis to determine the actual condition of the structure/component
  - Structure condition
  - Hydrodynamic and hydrostatic conditions
  - Water load
  - Salt load
- Determine the necessary key figures for soil injections (soil expertise/porosity etc.)

#### This results in:

- Planning of suitable remediation measures in accordance with the applicable rules and standards
- Selection of suitable material
- Selection of packers/lances
- Arrangement of the boreholes and placement of the packers/lances
- Carrying out a test injection if necessary

### Application instruction

- Injection by 1C or 2C pump
- Mixed material is moisture-sensitive; contact with water (e.g. rain) must be avoided
- If a prepared mixture is not used immediately, air humidity may cause a skin on the surface; this skin must be removed prior to further use (do not mix into the material!)
- Make sure the filter in the hopper is clean
- The mixture must be used completely within pot life
- Only use pure WEBAC material without any residues of cleaning agents or other impurity
- The reaction speed is influenced by the temperature of the material and the building structure – higher temperatures accelerate, lower temperatures slow down the reaction

### Mixing

#### Application by 1C pump

- Empty component A and B at the given mixing ratio into a mixing vessel (make sure that the containers are completely empty) and mix homogenously
- Transfer mixed material in a new mixing vessel, stir well again and fill into the hopper of the pump

#### Application by 2C pump

- Fill component A and B into the respective hoppers
- The components are mixed homogenously in the mixing head

### Application

- Adapt the injection pressure to the nature and condition of the building structure, limited to the water-bearing areas
- The injection is carried out in intervals, preferably in the rear third of the structural element's cross section. Conclusions can be drawn from the reaction of the material (surface emergence etc.) to decide whether to continue or to stop the injection
- Immediately after filling with WEBAC PU injection foam resins, carry out a subsequent sealing injection with PU resins using additional drill hole packers

### Final work and cleaning

- Once the material has cured remove the packers
- Clean the drill holes and close with suitable non-shrinking mortar
- Clean the component surface of patched cracks, grind flat if necessary
- Clean the pump with **WEBAC® Cleaner A**
- Use **WEBAC® Cleaner B** for dissolving cured material but never for flushing pumps
- Observe the technical data sheet of the injection pump and cleaners used
- For detailed information refer to the operating manual of the injection pump

# PU Injection Foam Resins

## WEBAC® 157 CE

Product data		
	Comp. A	Comp. B
Delivery form	19.8 kg	21.8 kg
	9.75 kg	10.75 kg
	4.5 kg	5 kg
Storage	<ul style="list-style-type: none"> <li>Between 5 °C and 30 °C</li> <li>Protected from moisture</li> <li>In original, sealed containers</li> </ul>	
Compatibility	<ul style="list-style-type: none"> <li>Compatible with concrete, steel, foil, cable sheathing and WEBAC injection materials</li> </ul>	
Resistance	<ul style="list-style-type: none"> <li>Resistant to salts harmful to the building, alkalis and acids in common concentrations in building structures</li> </ul>	

WEBAC-Chemie GmbH  
 Fahrenberg 22  
 22885 Barsbüttel  
 Germany  
 Tel. +49 40 67057-0  
 Fax +49 40 6703227  
 info@webac.de

[www.webac.de](http://www.webac.de)

### Occupational safety

The safety regulations of the industrial trade associations and the WEBAC Safety Data Sheets are to be observed at all times when working with this product. Safety data sheets according to Regulation (EC) No. 1907/2006 (REACH) must be accessible to all persons responsible for occupational safety, health protection and the handling of materials. For further information, please see the separate information sheet "Occupational Safety" in our product catalog or [www.webac.com](http://www.webac.com).

### Waste disposal

In Germany, empty containers can be disposed of via "Interzero Circular Solutions Germany GmbH" observing the respective terms and conditions. It is not possible to dispose of containers at production facilities or delivery warehouses. For more detailed information, please see the separate information sheet "Disposal Notes" in our product catalog or [www.webac.com](http://www.webac.com) and the safety data sheets.