


PU Injection Resins

## WEBAC® 1403

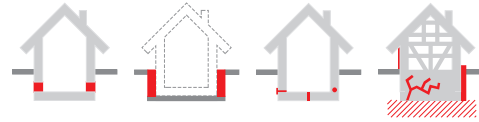

- ▶ WEBAC® 1403 is our most common PU injection resin for sealing and crack repair. The slight foam reaction provides completely closed pores in structural elements.

### Range of application

- Damp proof course (dpc) in masonry, specially in case of high water load classes
- Sealing of joint tapes
- Sealing of connection joints of precast walls
- Sealing of construction joints (waterproofing of gravel nests/ honey combs) and connection joints of precast walls
- Sealing of foundation pits
- Sealing injection in open-pored concrete structures (e.g. tamped concrete)


WEBAC-Chemie GmbH  
Fahrenberg 22  
22885 Barsbüttel  
Germany  
Tel. +49 40 67057-0  
Fax +49 40 6703227  
info@webac.de

[www.webac.de](http://www.webac.de)

### Properties

- Capillary obstruction, solidifying
- Quick-seal foam structure upon contact with water
- Slight foam reaction
- Low viscosity
- Universally applicable, reliable application
- Adjustable reaction time (accelerator **WEBAC. B14**)
- With accelerator also suitable for use at low temperatures
- Total solid\*

### Examples

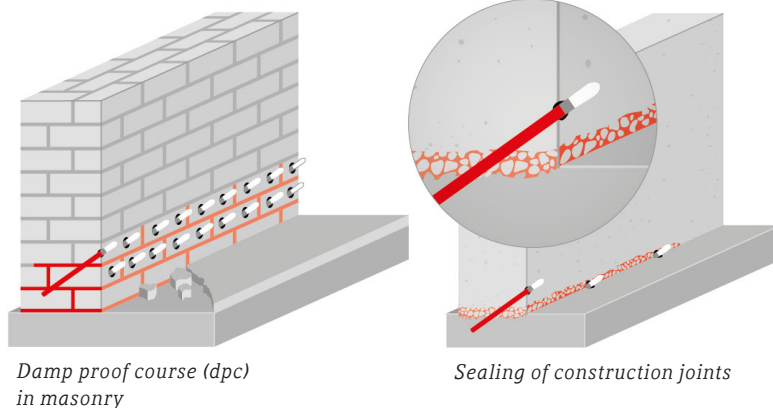

*Damp proof course (dpc) in masonry*

*Sealing of construction joints*

\*according to test method by Deutsche Bauchemie e.V. (German Industry Association for Manufacturers of Construction Chemicals)

## ▶ Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.  
© WEBAC-Chemie GmbH. Version 12/18

# PU Injection Resins

## WEBAC® 1403

Technical data	Values			
Mixing ratio	1 : 1 parts by volume			
Density, 20 °C / 68 °F (ISO 2811)	Comp. A	≈ 1.0 g/cm <sup>3</sup>		
	Comp. B	≈ 1.1 g/cm <sup>3</sup>		
Pot life	30 °C / 86 °F > 60 min	23 °C / 73 °F ≈ 90 min	12 °C / 54 °F ≈ 240 min	
Application temperature Building structure and material	> 5 °C / 41 °F			
Viscosity of mixture	30 °C / 86 °F ≈ 65 mPa·s	23 °C / 73 °F ≈ 80 mPa·s	12 °C / 54 °F ≈ 155 mPa·s	
Reaction time with 5% water Start · End · Expansion	21 °C / 70 °F ≈ 2 min · ≈ 5 min 30 s · ≈ 5-times			
Tear strength · elongation at break 7 d, 21 °C / 70 °F (ISO 527)	≈ 0.7 N/mm <sup>2</sup> · ≈ 50%			
Shore hardness A 7 d, 21 °C / 70 °F (EN 868)	≈ 48/43			
Watertightness (EN 14068)	< 2 bar			
Fire behavior	B2 according to DIN 4102-4. 2.3.2			
GISCODE	PU40			
EPD	EPD-DBC-20130014-IBG1-D			
Exposure scenarios according to REACH	Assessment of industry standard application			

WEBAC-Chemie GmbH  
Fahrenberg 22  
22885 Barsbüttel  
Germany  
Tel. +49 40 67057-0  
Fax +49 40 6703227  
info@webac.de

[www.webac.de](http://www.webac.de)

The specified data are values determined under laboratory conditions and are subject to a certain fluctuation. Deviations are possible in practice depending on the respective object situation.

## PU Injection Resins

# WEBAC® 1403



### Preparatory work

- ▶ See **WEBAC Brochures Sealing of Masonry and Crack Repair**



Sealing of Masonry



Crack Repair



### Mixing

#### Application by 1C pump

- Empty component A and B at the given mixing ratio into a bucket (make sure that the containers are completely empty) and mix homogenously
- Transfer the mixed material to the hopper

#### Application by 2C pump

- Fill component A and B into the respective hoppers
- The components are mixed homogeneously in the mixing head



### Application instruction

- The mixture must be used completely within the specified pot life
- Only use pure WEBAC material without any residues of cleaning agents or other impurity
- The reaction speed is influenced by the temperature of the material and the building structure – higher temperatures accelerate, lower temperatures slow down the reaction



### Application

- The injection pressure depends on the nature and condition of the building structure (< 10 bar for low pressure method or high pressure method starting at approx. 20 bar)
- Continue the injection until resin leaks out from the masonry and/or from the adjacent packers. This is necessary to get an even material distribution
- A secondary injection should be carried out depending on the moisture condition and foam behavior



### Final work and cleaning

- Once the material has cured remove the packers
- Clean and close the drill holes with suitable non-shrinking mortar
- The patching can be removed as soon as the injection process is completed and the filling material is cured
- Clean the pump with **WEBAC® Cleaner A**
- Use **WEBAC® Cleaner B** for dissolving cured material but never for rinsing pumps
- Observe the technical data sheet of the injection pump and cleaners used
- For detailed information refer to the operating manual of the injection pump used

WEBAC-Chemie GmbH  
 Fahrenberg 22  
 22885 Barsbüttel  
 Germany  
 Tel. +49 40 67057-0  
 Fax +49 40 6703227  
 info@webac.de

[www.webac.de](http://www.webac.de)

## ▶ Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.  
 © WEBAC-Chemie GmbH. Version 12/18

## PU Injection Resins

# WEBAC® 1403

Product data													
<b>Application</b>	Injection by 1C or 2C pump												
<b>Material consumption</b> for post-construction damp proof course (dpc) (depending on the pore and cavity volume of the masonry)	<ul style="list-style-type: none"> <li>• Thumb rule: ≈ 1 kg/m per 10 cm wall thickness</li> <li>• For masonry with wall thickness &gt; 60 cm: ≈ 1.2 kg/m per 10 cm wall thickness</li> </ul>												
<b>Packing</b>	<table border="1"> <thead> <tr> <th>Comp. A</th> <th>Comp. B</th> </tr> </thead> <tbody> <tr> <td>198 kg</td> <td>217 kg</td> </tr> <tr> <td>21 kg</td> <td>23 kg</td> </tr> <tr> <td>10.5 kg</td> <td>11.5 kg</td> </tr> <tr> <td>5 kg</td> <td>5.5 kg</td> </tr> <tr> <td>1 kg</td> <td>1.1 kg</td> </tr> </tbody> </table>	Comp. A	Comp. B	198 kg	217 kg	21 kg	23 kg	10.5 kg	11.5 kg	5 kg	5.5 kg	1 kg	1.1 kg
Comp. A	Comp. B												
198 kg	217 kg												
21 kg	23 kg												
10.5 kg	11.5 kg												
5 kg	5.5 kg												
1 kg	1.1 kg												
<b>Storage</b>	<ul style="list-style-type: none"> <li>• Between 5 °C / 41 °F and 30 °C / 86 °F</li> <li>• Protect from moisture</li> <li>• In original, sealed containers</li> </ul>												
<b>Compatibility/Resistance</b>	<ul style="list-style-type: none"> <li>• Compatible with masonry mortar, concrete, steel, foil, cable sheathing, steel and WEBAC injection materials</li> <li>• Resistant to harmful salts, alkalis and acids in common concentrations in building structures</li> </ul>												

WEBAC-Chemie GmbH  
 Fahrenberg 22  
 22885 Barsbüttel  
 Germany  
 Tel. +49 40 67057-0  
 Fax +49 40 6703227  
 info@webac.de

[www.webac.de](http://www.webac.de)

### Test certificates

- Test certificate\* according to German Federal Environmental Agency: Repair system for containers
- Test certificate\* according to KTW recommendations: D1 (large sealing of surfaces)
- Test Report on the efficiency as injection material for post-construction damp proof courses (dpc) to prevent capillary rising moisture in masonry
- Further test certificates on request

### Occupational safety/waste disposal

#### ▶ Downloads on webac-grouts.com



webac-grouts.com/  
downloads

\* for drinking water

## ▶ Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.  
 © WEBAC-Chemie GmbH. Version 12/18