

PU Injection Resins

WEBAC® 1401



WEBAC®

Range of application

- Damp proof course (dpc) in masonry, preferably for compact masonry structures and high wall thicknesses
- Sealing of gypsum-based masonry, also in monument conservation
- Sealing injections in masonry and open-pored concrete structures (e.g. tamped concrete)


Properties

- Polyurethan-based injection resin
- Capillary obstruction, solidifying
- Extremely low viscosity
- Low foam development
- Good penetration
- Long pot life


Test certificates

- WTA Certificate
- Environmental Product Declaration (EPD)
- List of chemical resistance

Examples

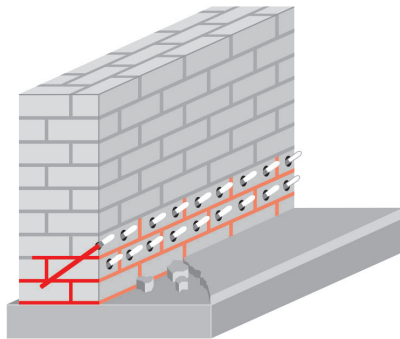

*Damp proof course (dpc)
in masonry*

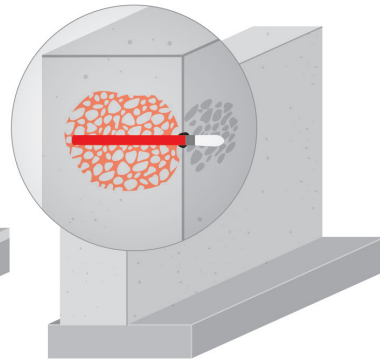

Sealing of tamped concrete

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
© WEBAC-Chemie GmbH. Version 03/2024



Technical data	Values			
Mixing ratio	3 : 1 parts by volume			
Density, 20 °C (DIN ISO 2811)	Comp. A	≈ 0.95 g/cm ³	Comp. B	≈ 1.2 g/cm ³
Pot life (WEBAC test specification based on DIN ISO 9514)	30 °C	≈ 120 min	23 °C	≈ 120 min
			12 °C	≈ 420 min
Application temperature Building structure and material	> 5 °C			
Viscosity of mixture (WEBAC test specification based on DIN ISO 3219)	30 °C	≈ 35 mPa·s	23 °C	≈ 45 mPa·s
			12 °C	≈ 78 mPa·s
Reaction time with 5% water Start · End · Expansion	21 °C	≈ 14 min · ≈ 18 min · ≈ 1.1-times		
Tear strength · Elongation at break 7 d, 21 °C (DIN ISO 527)	≈ 0.34 MPa (N/mm ²) · ≈ 40%			
Shore hardness A 7 d, 21 °C (DIN EN 868)	≈ 13/11			
Fire behavior (DIN 4102-4. 2.3.2)	B2			
GISCODE	PU40			
EPD	EPD-FEI-20220108-IBG1-EN			
Exposure scenarios according to REACH	Assessment of industry standard application			

The specified data are values determined under laboratory conditions and are subject to a certain fluctuation. Deviations are possible in practice depending on the respective object situation.

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de



Preparatory work

Structural analysis:

- Preparation of a building condition analysis to determine the actual condition of the structure/component
 - Structure condition
 - Hydrodynamic and hydrostatic conditions
 - Water load
 - Salt load
- Determine the necessary key figures for soil injections (soil expertise/porosity etc.)

This results in:

- Planning of suitable remediation measures in accordance with the applicable rules and standards
- Selection of suitable material
- Selection of packers/lances
- Arrangement of the boreholes and placement of the packers/lances
- Carrying out a test injection if necessary

Application instruction

- Injection by 1C pump by low pressure or high pressure method
- Make sure the filter in the hopper is clean
- The mixture must be used completely within pot life
- Only use pure WEBAC material without any residues of cleaning agents or other impurity
- The reaction speed is influenced by the temperature of the material and the building structure – higher temperatures accelerate, lower temperatures slow down the reaction

Mixing

- Empty component A and B at the given mixing ratio into a mixing vessel (make sure that the containers are completely empty) and mix homogeneously
- Transfer mixed material in a new mixing vessel, stir well again and fill into the hopper of the pump

Application

- Adapt the injection pressure to the nature and condition of the building structure (< 10 bar for low pressure method or high pressure method starting at ≈ 20 bar)
- Continue the injection until resin leaks out from the masonry and/or from the adjacent packers. This is necessary to get an even material distribution
- A secondary injection must be carried out depending on the moisture condition and foam behavior

Final work and cleaning

- Once the material has cured remove the packers
- Clean the drill holes and close with suitable non-shrinking mortar
- Clean the component surface of patched cracks, grind flat if necessary
- Clean the pump with **WEBAC® Cleaner A**
- Use **WEBAC® Cleaner B** for dissolving cured material but never for flushing pumps
- Observe the technical data sheet of the injection pump and cleaners used
- For detailed information refer to the operating manual of the injection pump

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de



Product data

Material consumption for post-construction damp proof course (dpc) (depending on the pore and cavity volume of the masonry)

- Thumb rule:
≈ 1 kg/m per 10 cm wall thickness
- For masonry with wall thickness > 60 cm:
≈ 1.2 kg/m per 10 cm wall thickness

Delivery form

Comp. A	Comp. B
180 kg	3 x 25.3 kg
23.25 kg	9.75 kg
9 kg	3.8 kg

Storage

- Between 5 °C and 30 °C
- Protected from moisture
- In original, sealed containers

Compatibility

- Compatible with masonry mortar, concrete, steel, foil, cable sheathing, metal and WEBAC injection materials

Resistance

- Resistant to salts harmful to the building, alkalis and acids in common concentrations in building structures

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

Occupational safety

The safety regulations of the industrial trade associations and the WEBAC Safety Data Sheets are to be observed at all times when working with this product. Safety data sheets according to Regulation (EC) No. 1907/2006 (REACH) must be accessible to all persons responsible for occupational safety, health protection and the handling of materials. For further information, please see the separate information sheet "Occupational Safety" in our product catalog or www.webac.com.

Waste disposal

In Germany, empty containers can be disposed of via "Interzero Circular Solutions Germany GmbH" observing the respective terms and conditions. It is not possible to dispose of containers at production facilities or delivery warehouses. For more detailed information, please see the separate information sheet "Disposal Notes" in our product catalog or www.webac.com and the safety data sheets.